

PULSE-REVERSE POWER SUPPLY



plating electronic
we care for power

POWER PULSE pe80CD804

Output power:	max. 4 x 16000 Watts
Effective - and DC-current:	max. 4 x 1060 A
Reverse-current:	max. 4 x 2400 A
Effective voltage:	Standard 4 x 6 V, other voltages on request (up to 550V)

Typical applications:
PCB lines



POWER PULSE pe80CD804, front view with
Control unit pe8005

Characteristic values

Switch mode technology

4-fold output

Linearity inaccuracy < 1 % (related to nominal DC value)

Ripple less than < 1 % (related to nominal DC value)

Complex waveforms

Constant current regulation (voltage regulation on request)

SPI interface for control unit pe8005

Fast rise and fall times (rectangular waveforms)

Permanent short circuit and open circuit proof

Microprocessor controlled regulation

Mains supply: standard 400 V/3~ +/- 10 % / 50-60 Hz
(other voltages on request)

Max. effective output power: see below matrix

Cooling

Water cooled (designed for the direct installation at the electroplating tank)

Ambient temperature 40°C

Over temperature protected

Design

Compact Rittal TS cabinet; protection grade IP54

DC/Pulse connection in back panel (tin copper bus bars)


EMV: EN50011 class A, group B ; EN61000-6-4 and EN61000-6-2;
CE-conformity low voltage guide line: EN50178

Typ	pe80CD804	other sizes on request
Forward or DC current	4 x 1060 A	
Reverse pulse current	4 x 2400 A	
Effective output voltage	6 V	
Minimum time reverse-pulse	0.1 msec.	
Water cooling		
Max. water inlet temperature	23°C - 26°C	
Max. water outlet temperature	40°C	
Water consumption approx.	9.2 l/min	
Weight	approx. 520 kg	


plating electronic GmbH | 79350 Sexau | Fon +49 7641 93500-0 | www.plating.de
Rheinstr. 4 | Germany | Fax +49 7641 93500-999 | info@plating.de



Dimensions (W x H x D): 800 x 2200 x 600 mm

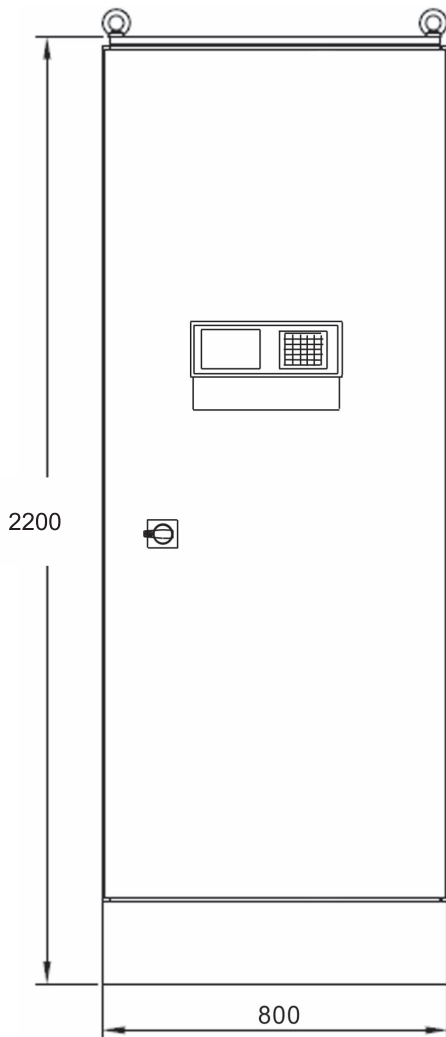

Pulse output bus bars:

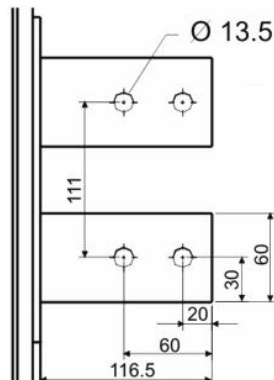

Operation / programming (via external pe8005 control unit)


- Large illuminated 5,7" graphic display
- 5 x 4 keypad for easy handling and navigation
- Clear and user friendly menu navigation via well structured pull down menus
- Easy generation of complex waveforms with up to 16 individual steps with 2 individual amplitudes (I_{x1} and I_{x2} as well as t_{x1} and t_{x2}), that can be positive or negative
- MMC/SD card reader for software update, import / export of device configuration, set values and storing of bus-logging data
- RS485 interface (optional: PROFIBUS or TCP/IP)
- Synchronization function
- 2 programmable output relays
- Ah-totalizer, dosage counter, timer
- Programmable START ramp
- Parameters individually adjustable even during operation

Display


- Clear display of actual values
- Graphic view of the set value shape, actual values shown in oscilloscope-mode
- Status, warning and error indication

Resolution

- 0 up to +/- xx.xA for I_{x1} and I_{x2} ; resolution: 100mA
- 0 up to 9 999.9mSec for t_{x1} and t_{x2} ; resolution: 0,1mSec
- Cycles (repeatings per step): 1 - 99

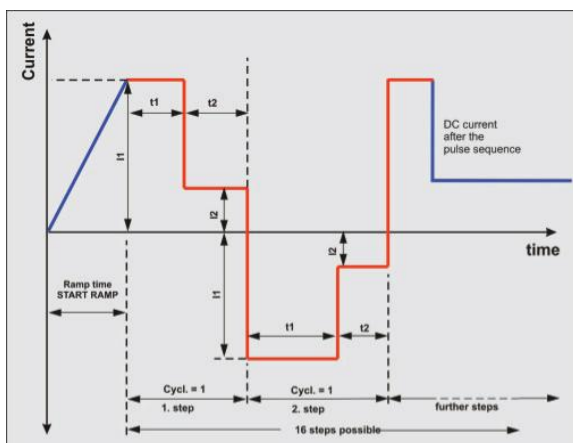

Examples: pulse shapes, schematic display

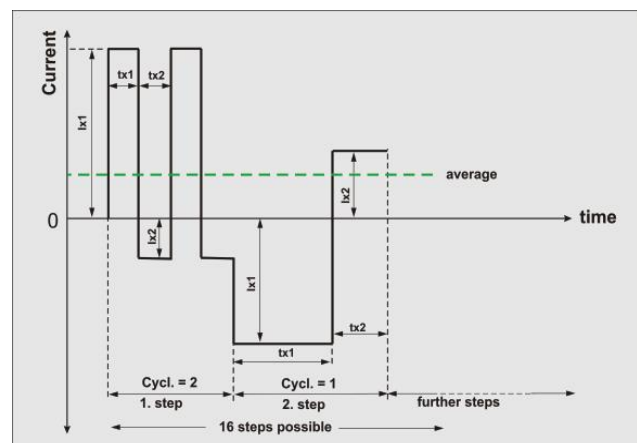

Example 2: with average value


Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.

PULSE-REVERSE POWER SUPPLY



POWER PULSE pe80CD804



plating electronic
we care for power

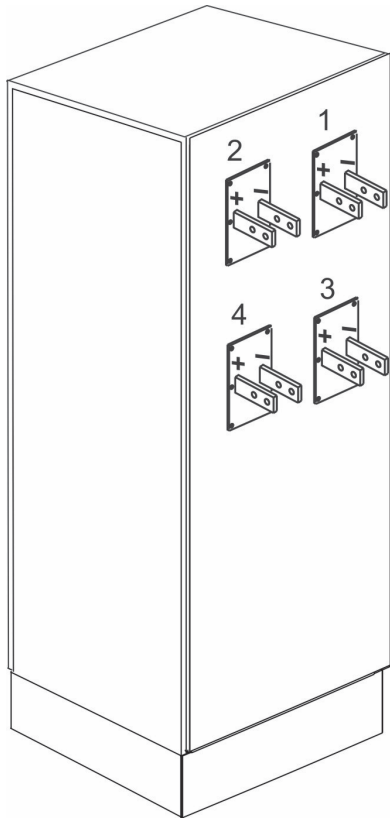


Graphic:
example for pulse curves that can
be generated by the pulse rectifier

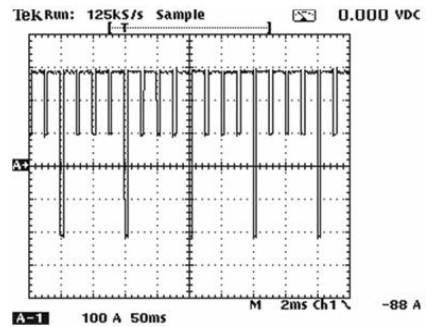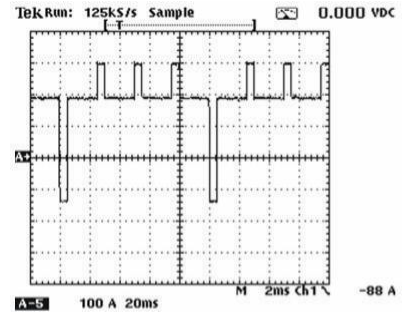

Back panel with pulse output bus bars

Wiring diagram pe80CD Pulse-Reverse Power Supply and control unit pe8005

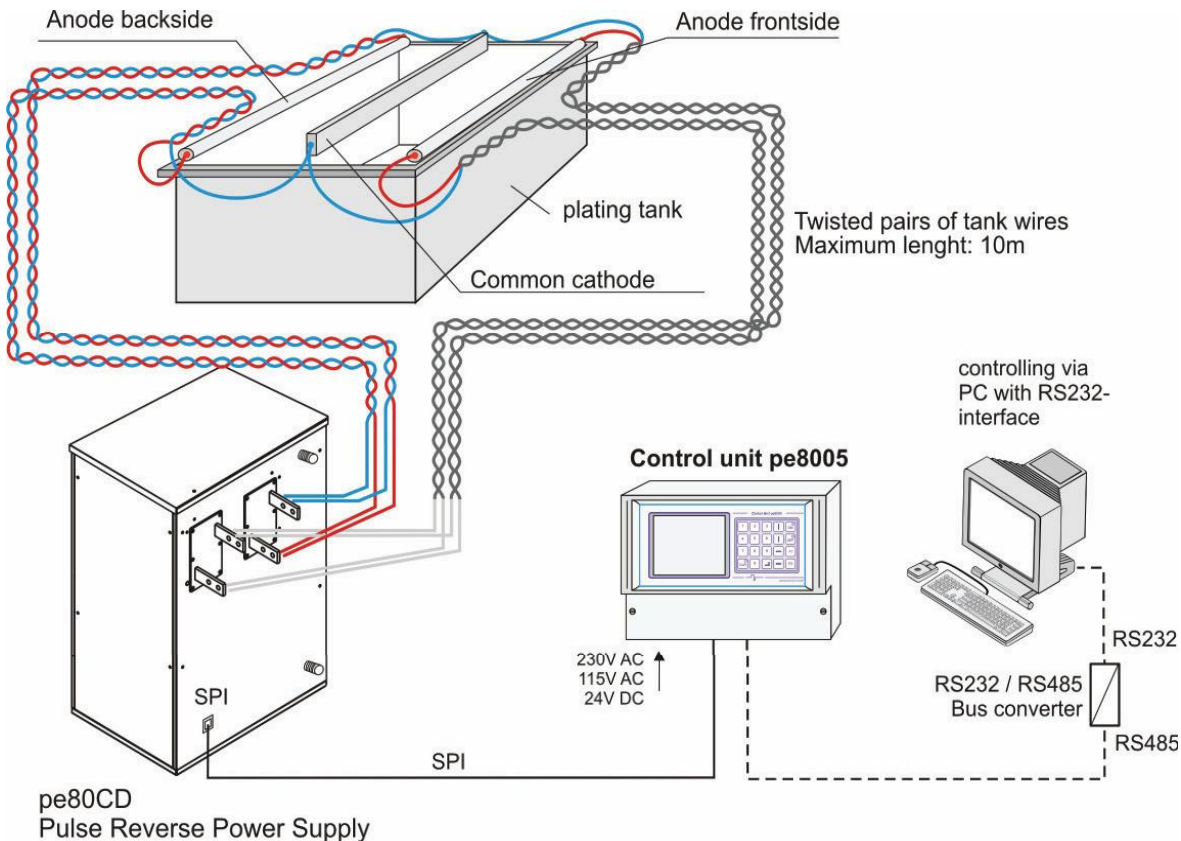

Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.