

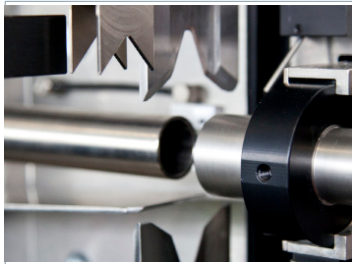
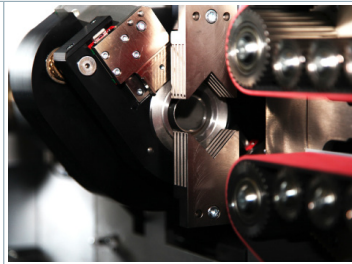


Innovators in Wire Processing

MegaStrip 9650
Automatic Cut & Strip Machine

CUT & STRIP

MegaStrip 9650 - In a class of its own

			
Indexing cutter head with multiblades	Rotary incision unit, Schleuniger RX-technology	Print-head position after cut axis	10" color touch screen

Technical Specifications

Max. Cable Diameter	35 mm (1.38")
Max. Cable Cross Section	Standard 120 mm ² (4/0 AWG) Optional 240 – 300 mm ² (MCM 300) both depending on cable type
Cable Length Standard Mode	150 – 999'999 mm (standard) 225 – 999'999 mm (configuration 2 inkjet)
Short Mode	< 150 mm (standard) (6") < 225 mm (configuration 2 inkjet) (8.8")
Stripping Length Left / Right	< 999'999 mm
Max. Pull Off Length Left Side	220 mm (standard) (8.6") 300 mm (configuration 2 inkjet) (11.8")
Right Side	360 mm (standard) (14.1")
Max. Transport Speed	3 m/sec
Blade Cartridges Cartridge Grids	Standard, quick changeable 2 x 56 mm 4 x 28 mm 56 + 2 x 28 mm Customized on request
Interfaces	Ethernet, USB, RS 232, pre-/postprocessing interface, hotstamp, 2 x inkjet, foot pedal, NV1XXX
Power Supply	Connection 2L + N 200 - 240 VAC 3L 200 - 240 VAC
Air Supply	Required 6 bar
Dimensions (L x W x H)	1'590 x 1'030 x 1'365 mm over all (63" x 41" x 54")
Weight	M version 435 kg MR version 463 kg

Sales and Service by:

Schleuniger Group
Thun | Switzerland
www.schleuniger.com

To Be Precise.